

Metis

OR-K-MT1

Orbital Express Truss™ features over 40 professionally designed "off-theshelf" kits for a variety of booth sizes and configurations. Each kit comes complete with all the parts, fixtures and fittings you need to create a successful exhibit, including (depending on the kit) low voltage spotlights and adjustable tabletops. A benefit to this versatile system is that it enables you to reconfigure kits in multiple ways and combinations using the same parts. Orbital Express Truss can also be easily customized!

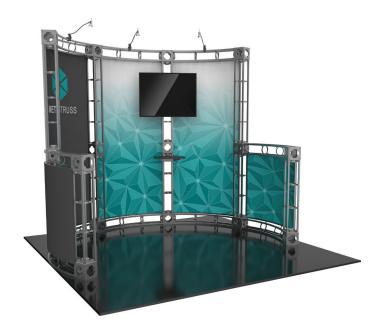



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- Kit includes:

- 16 x 6-way junction boxes
- 6 x 36" straight truss lengths
- 4 x 46" straight truss lengths
- 10 x 45° curved truss length
- 1 x full set of quicklock connectors
- 1 x adjustable tabletop
- 1 x LCD monitor mount
- 3 x 50 watt spotlights
- 1 x OCF2 molded case

- 10' x 10' kit size
- Custom appearance
- Tooless assembly
- Simple twist and lock design
- 5 year warranty against manufacturer defects
- dimensions: Hardware:

Hardware:	Graphics:	
Fits in a 10' x 10' space	Total finished size: Panels MT1 & MT5: 43″w x 37.75″h	
	Panels MT2, MT3 & MT4 : 43″w x 90″h	
Shipping:	*All dimensions available in millimeters Please be sure to include a 2" bleed around	
1 OCF2 case: 51″l x 51″w x 24″h	perimeter. Refer to related graphic template for specific information on sizes and bleeds. Dye-sublimated graphic require different bleed than UV.	
1295.4mm(l) x 1295.4mm(w) x 609.6mm(h)		
Approximate weight: 332 lbs / 151 kgs	Visit exhibitors-handbook.com/graphic-templates	
additional information:		

Graphic materials: Dye sublimated or UV panels


Lumina 1, 50 watt spotlight

Monitor mount holds 13"-39"LCD, maximum weight = 50 lbs / 22.68 kgs *Kit does not include monitor


Tabletop color options: (if applicable)




METIS PIECE COUNT:

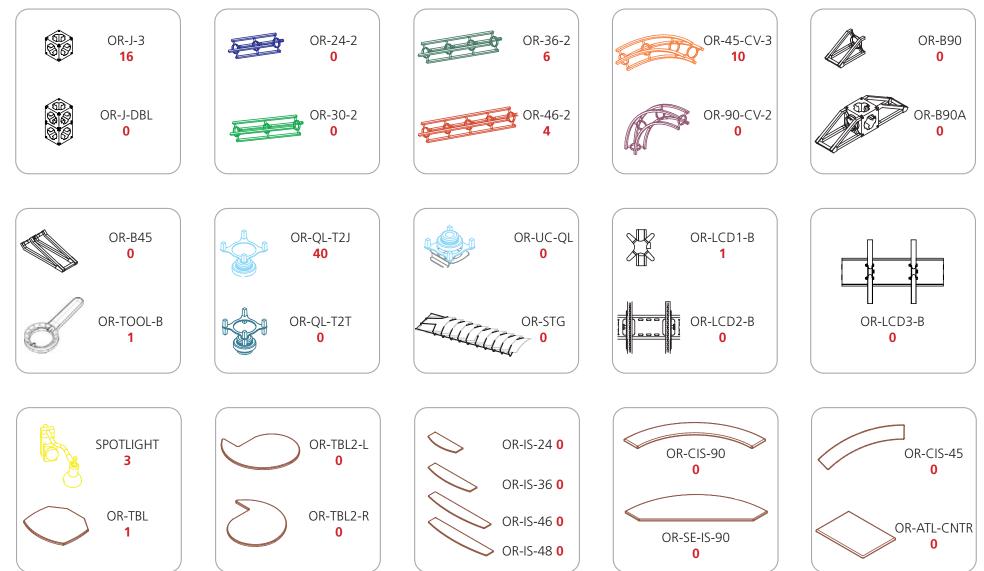



METIS TABLETOP ACCESSORY PIECE COUNT:

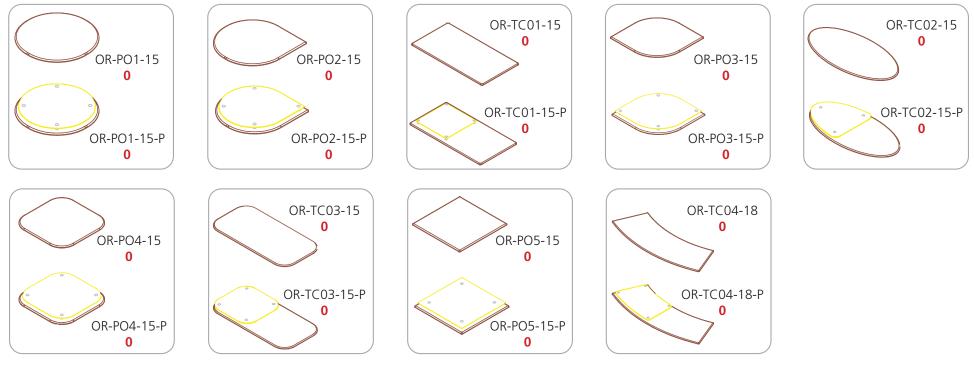

METIS CASE COUNT:

















METIS GRAPHIC SPECS: AVAILABLE GRAPHICS – UV & DYE SUBLIMATION

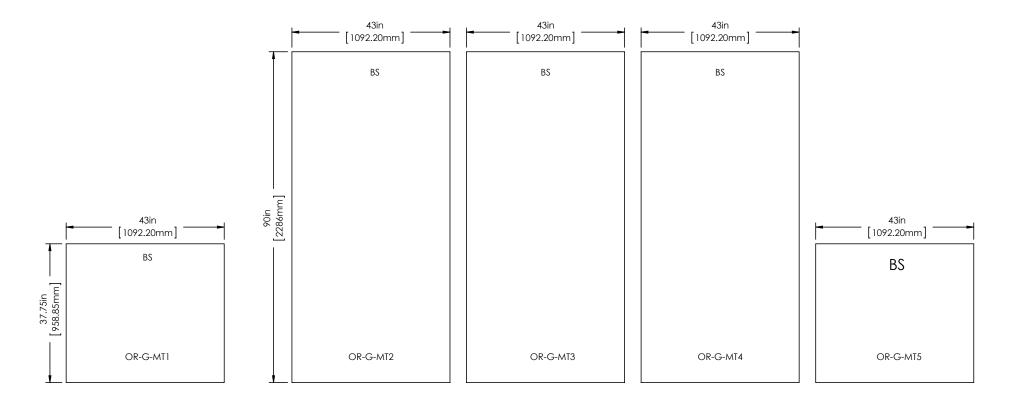


Acceptable File formats:	Bleeds:	Color:	Finishing Details:
Illustrator CC or below	All orbital truss graphics require specifics bleeds.	All files are printed as CMYK format. All critical	When graphics are notched, a 7/8" square is cut in
Photoshop CC or below	The sizes listed above represent the finished	Pantone colors need to be called out in the file	the appropriate location.
Art time will be charged if files need to be fixed	graphic size. Please keep all logos, type and	or specified on the order as Coated or Uncoated	
or altered to meet guildlines. When sending files	critical information at least 1" in from each edge	swatches.	FS: Graphics mounted to front of truss system
please be sure to include all support art (fonts,	of the finished graphic.		BS: Graphics mounted to back of truss system
linked images, etc.)		Resolution:	
	Dye Sublimation: 2" bleed around the	All raster files (either print files or linked files)	Dye Sublimation graphics are attached to truss
Font Specifications:	perimeter.	must be at 100-120 pixels per inch at 100%	with velcro. UV panels are attached to truss with
Fonts must be converted to outlines.	UV: 1/2 " bleed around the perimeter.		magnet.

To ensure quality, please note:

Each graphic has a specific code or number located on the graphic. The electronic print files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently. If you fail to provide your graphic files in this format, additional charges may be necessary to complete your printed materials.


METIS GRAPHIC LAYOUT:

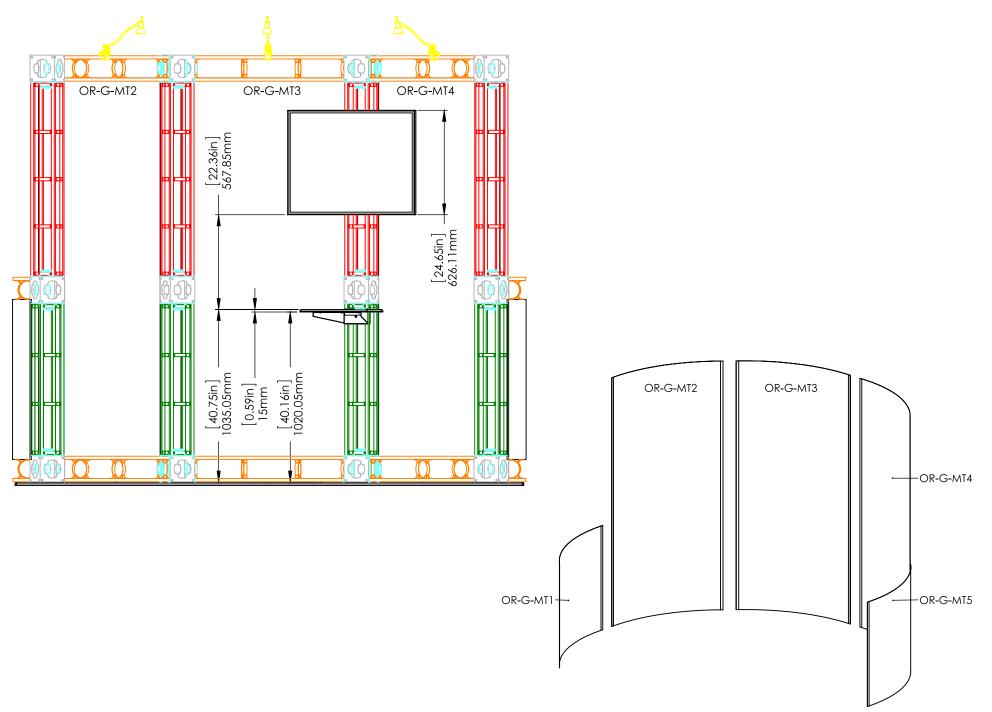



METIS FLOOR PLAN:

SCALE REF = 5ft

10'd x 10'w Inline

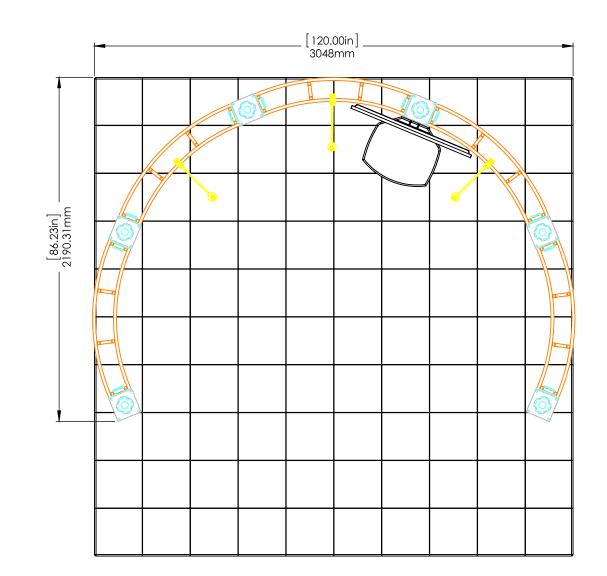

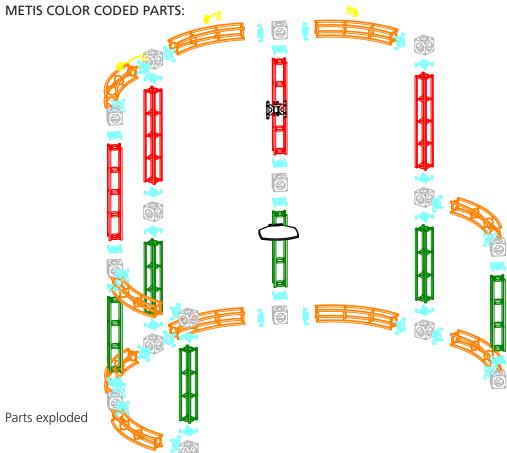

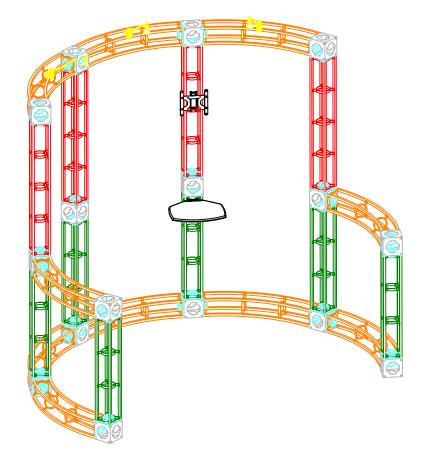

Parts exploded