Part Count:

Atlantis 6 [OR-K-ATL6], 10' x 20' Kit Size





							49				DQ		
OR	R-J-3 OR-J	-DBL	OR-	24-2 OF	R-30-2	OR-	36-2	OR-	46-2	OR-45	5-CV-3	OR-90	-CV-2
06		00	00		00	00			80	10			00
								K				aa	007
OR-	-B90 OR-E	390A	OR-	B45 OR-1	TOOL-B	OR-Q	L-T2J	OR-Q	L-T2T	OR-U	IC-QL	OR-S	STG
00		00	06		02	28			10	00			00
OR-L	CD1-B OR-LC		OR-LO	CD3-B		SPOTI	LIGHT	OR-	TBL	OR-T	BL2-L	OR-TE	BL2-R
00		00	00			04			00	00			00
00	OR-IS-24	>		OR-CIS-	90]	/			0	
00	OR-IS-36		00										
00	OR-IS-46			OR-SE-IS	-90	OR-C	IS-45	OR-ATI	CNTR	OR-P	O1-15	OR-PO	1-15-P
00	OR-IS-48		00			00			02	00			00

		°				>
OR-P	O2-15	OR-PO	2-15-P	OR-TO	01-15 OR-TO	01-P-15
00			00	00		00
OR-P	O3-15	OR-PO	3-15-P	OR-TO	002-15 OR-TC	02-P-15
00			00	00		00
		0			0	
						2
OR-P	04-15	OR-PO	4-15-P	OR-TO	003-15 OR-TC	03-P-15
OR-P	O4-15	OR-PO	00	OR-T0	C03-15 OR-TC	00 00
	O4-15	OR-PO			003-15 OR-TC	
00	O4-15 05-15	OR-PO	00	00		

Note: MDF finishes may vary.


- *-S
- *-B
- *-WD
- *-DWD

Graphic Specs:

Atlantis 6 [OR-K-ATL6], 10' x 20' Kit Size





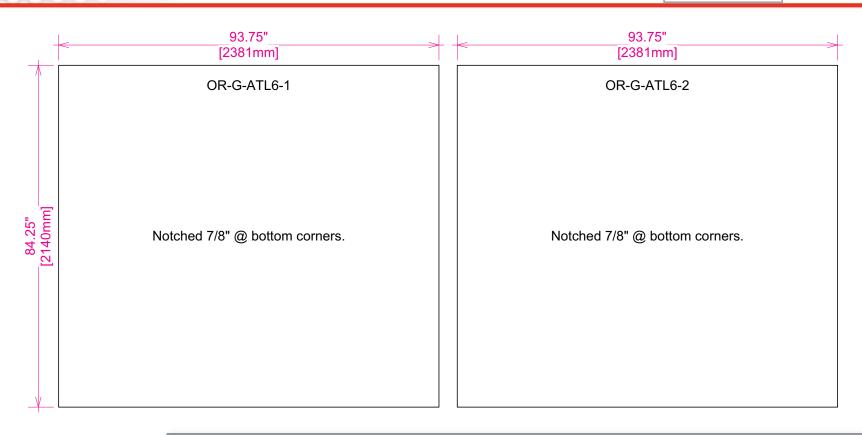

Available Graphics: Dye-Sublimation Graphics Only

Acceptable File Formats:

Illustrator CS3 or below Photoshop CS3 or below

Art time will be charged if files need to be fixed or altered to meet guidelines. When sending files please be sure to include all support art (fonts, linked images, etc.)

Font Specifications:

Fonts must be converted to outlines.

Bleeds

All orbital truss graphics require specific bleeds. The sizes listed above represent the finished graphic size. Please keep all logos, type, and critical information at least 1" in from each edge of the finished graphic.

Dye Sublimation: 2" bleed around the perimeter.

Inkjet & UV: 1/2" bleed around the perimeter.

Color

All files are printed as CMYK format.
All critical Pantone colors need to
be called out in the file or specified
on the order as Coated or Uncoated
swatches.

Resolution:

All raster files (either print files or linked files) must be at 100-120 pixels per inch at 100%.

Finishing Details:

When graphics are notched, a 7/8" square is cut in the appropriate location

FS: Graphics mounted to front of the truss system


BS: Graphics mounted to back of the truss system

Dye Sublimation graphics are attached to truss with velcro. Inkjet & UV panels are attached to truss with magnet.

IMPORTANT INFORMATION REGARDING GRAPHIC FILES: Each graphic has a specific code or number located on the graphic.

The electronic print ready files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently.

If you fail to provide your graphic files in this format, additional charges may be necessary to complete your printed materials.













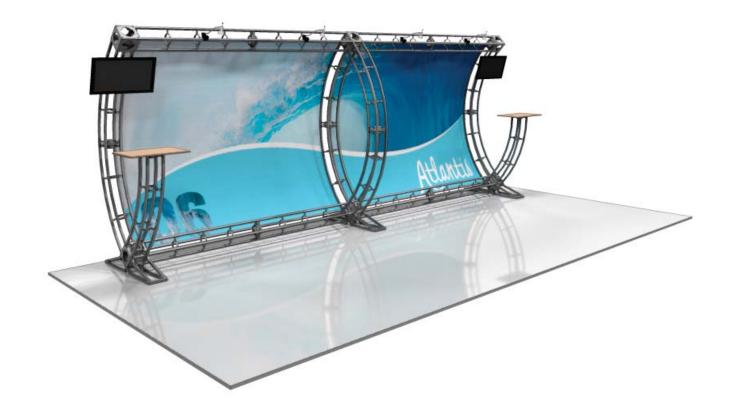

Color Coded Parts: Atlantis 6 [OR-K-ATL6], 10' x 20' Kit Size






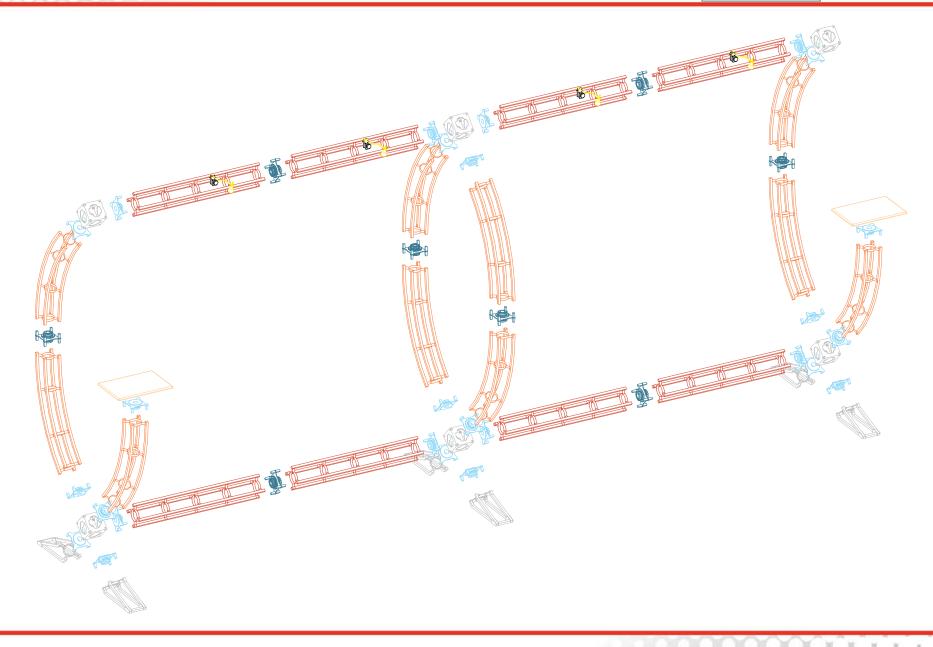



Color Coded Parts: Atlantis 6 [OR-K-ATL6], 10' x 20' Kit Size





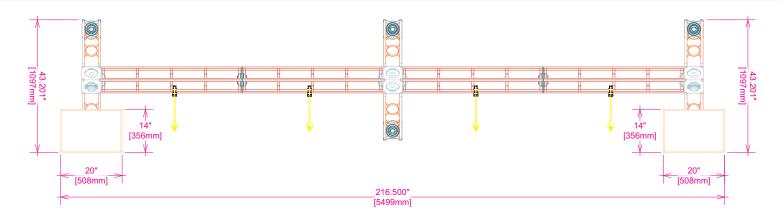

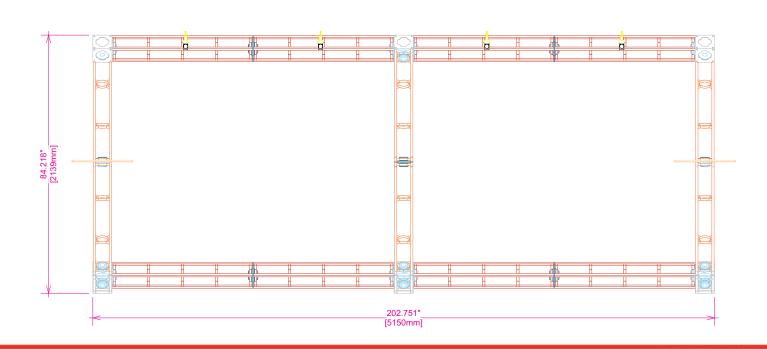

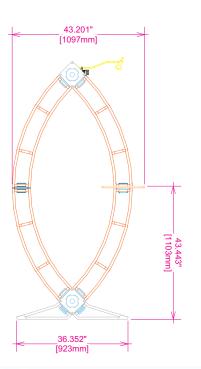


Floor Plan:

Atlantis 6 [OR-K-ATL6], 10' x 20' Kit Size





SCALE REF = 5ft

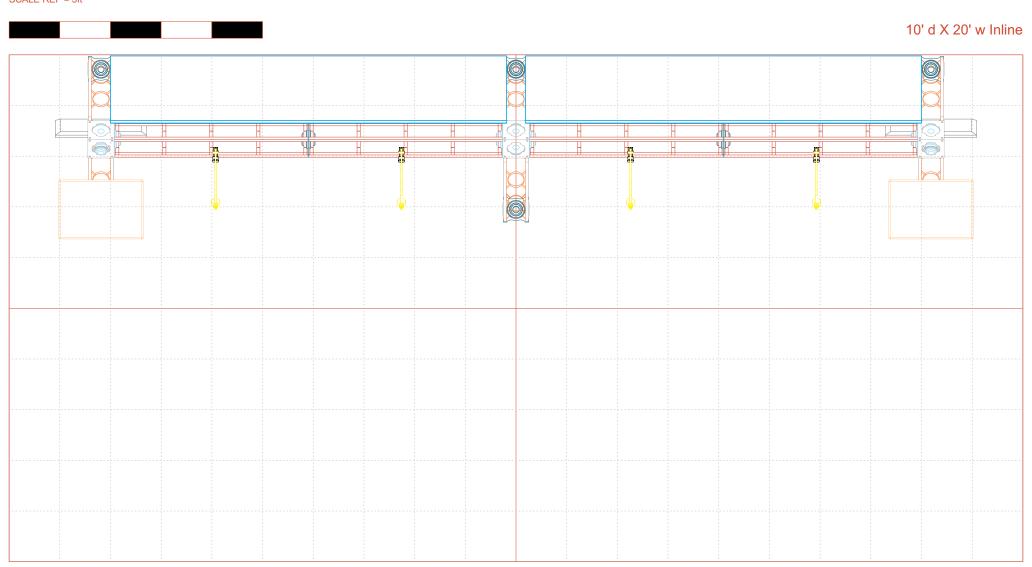

Case Count:

Atlantis 6 [OR-K-ATL6], 10' x 20' Kit Size





